

Home	<b>MGCP</b> OOB Signalling
Network	
Security	
<b>MGCP</b>	<b>MGCP Configuration</b>
CODECS	
Miscellaneous	
Services	
VLAN	
IGMP	
SNMP	
Download	
Reset	

---

**MGCP Call Agent Settings**

Call Agent Address:  (IP or FQDN)

Call Agent Port:

---

**Endpoint Settings**

EdgeGate VoIP Gateway Domain Name:

Max. delay before RSIP:  (seconds)

Max. disconnect delay before RSIP:  (seconds)

Allocated Endpoints:

---

**Compatibility**

Support PacketCable NCS 1.0

Support IETF MGCP 1.0 (RFC 2705)

Support Message Piggybacking

---

MGCP Settings

- Home
- Network
- Security
- MGCP**
- CODECS
- Miscellaneous
- Services
- VLAN
- IGMP
- SNMP
- Download
- Reset

MGCP **OOB Signalling**

**RTP Telephone Event (RFC2833) Configuration**

- Send Telephone Events via RFC2833 signalling using payload value:
  - Enable Keypad Events (0-9, \*, #)
  - Suppress voice packets during RFC2833 Telephone Event packet transmission
  - Squelch inband DTMF audio
  - Play DTMF received via RFC2833
- ABCD event signalling mode:

Save RFC2833 Settings

MGCP Settings – OOB Signaling

- Home
- Network
- Security
- MGCP
- CODECS**
- Miscellaneous**
- Services
- VLAN
- IGMP

**Clock** Local Syslog Protocol Ports

**Clock**

- NTP Server:
- Time Zone:
- Adjust clock for daylight savings

Save Settings

- Home
- Network
- Security
- MGCP
- CODECS**
- Miscellaneous
- Services
- VLAN
- IGMP
- SNMP
- Download
- Reset
- Log out


**CODECS**

**Audio/CODEC Configuration**

- CODECS
- Selected
- G711U
  - G711A
  - G723
  - G726
  - G729

- Jitter Buffer**
- Adaptive Jitter Buffer:  (maximum playout delay in milliseconds)
  - Fixed Jitter Buffer:  (fixed playout delay in milliseconds)

Save CODEC Configuration

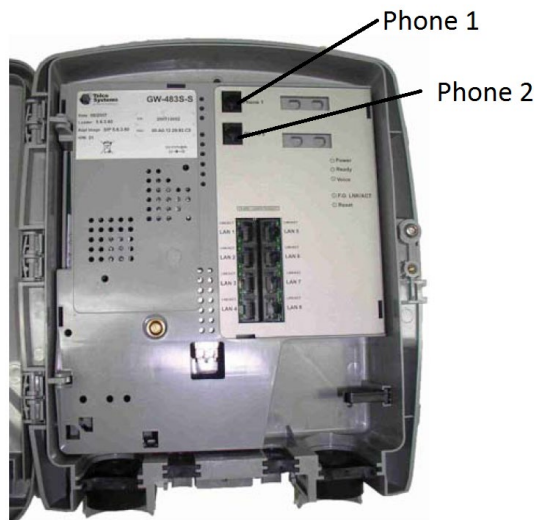

483D Phone Connection