

**MC60** 


Quick Start Guide

#### INSTALLATION

The MC60 adapter is installed between the incoming coaxial wall jack and the destination device, such as a TV or a set-top box.

- 1 Connect a coax cable to the In port (or similar input port) on the destination device and to the TV OUT port on the MC60 adapter.
- Connect a coax cable to the cable wall jack and to the MoCA® IN port on the MC60 adapter.
- 3 Connect the power adapter to a wall outlet and then to the DC 5V port on the MC60. Press the ON/OFF button on the MC60. The Power LED light glows white. The MoCA® LED glows green briefly and then blinks to white.
- Turn on your TV to confirm that TV service is available. If it is not available, verify all cables are securely connected.

To connect an Ethernet-capable device (such as an Internet-enabled TV), connect an Ethernet cable to the device and to the **Ethernet** port of the MC60 adapter. The Ethernet LED glows green and then blinks green.

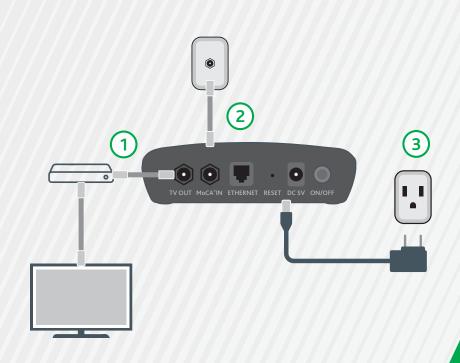

### LED INDICATORS

The LEDs on top of the MC60 can assist you in better understanding the current state of your adapter.




### **SYMBOLS**

The symbols displayed on the MC60 labeling are explained below.

Symbol	Indicates
$\diamondsuit - \otimes \diamondsuit$	Polarity of DC power connector.
===	DC voltage.
$\sim$	AC voltage.
$\bigcirc$	For indoor use only.
	Class II equipment.
(VI)	Energy Efficiency Marking.

## OPTIONAL WALL MOUNT

1 Insert the two included screws into the wall using the template below. Using wall anchors is recommended.



2 Slide the adapter down on the screws.





# Additional Support

If you require further instructions, please contact your local ISP Support.

SmartRG Inc, an ADTRAN Company. All Rights Reserved. ©2019