


## PSU/RGU

CLEI: SIPUBBBB\_\_

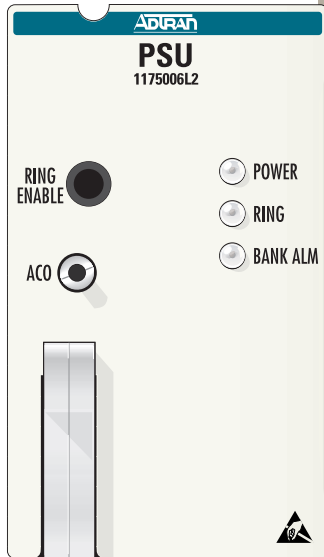

## TURN UP STEPS

- 1 Unpack the Total Access 750 PSU card and inspect for damage. If damage is apparent, refer to your carrier or supplier for remedy.
- 2 Insert PSU card into Total Access 750 chassis slot marked PSU. To insert, hold the PSU card by the faceplate while supporting the bottom edge of the card. Align the card edges with the guide grooves in the Total Access 750 chassis. Insert into chassis until the edge card connector seats firmly into the chassis backplane. Lock the unit in place by pushing in on the locking lever.

## COMPLIANCE CODES

This product is intended to be installed in products providing a Type "B" or "E" enclosure, and in a Restricted Access Location.

Code	Input	Output
Power Code (PC)	F	C
Telecommunication Code (TC)	-	-
Installation Code (IC)	A	-

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by ADTRAN could void the user's authority to operate this equipment.

## STATUS LEDs

- |                   |            |   |
|-------------------|------------|---|
| <b>POWER</b>      | ● On       | Power on  |
| <b>RING</b>       | ● On       | Ring enabled                                      |
|                   | ○ Off      | Ring disabled                                     |
| <b>BANK ALARM</b> | ● On       | Alarm condition                                   |
|                   | ○ Off      | Normal operation                                  |
|                   | * Flashing | Alarm acknowledged by pressing the ACO pushbutton |

## ALARM CUT-OFF (ACO) PUSHBUTTON

- Depress to disable any audible bank alarms.

*Note: The ACO pushbutton does not override power failure alarms*

### Alarm Notification

Alarm Condition	Relays Activated
Local Alarm	MJR, MJVR
Remote Alarm	MJR, MJVR
AIS Alarm	MJR, MJVR
PSU Power Fuse Fails	MJR, MJVR, -48ALM
Power Failure Alarm	MJR, MJVR
Alarms ACO Deactivates	MJR

### Warning:

*Ring Voltage is hazardous! Disable Ring Voltage from the Total Access 750/850 by pressing the Ring Enable switch and ensuring that the Ring LED is OFF prior to performing open chassis or wiring operation.*

## WARRANTY

Warranty for Carrier Networks products manufactured by ADTRAN and supplied under Buyer's order for use in the U.S. is ten (10) years. For a complete copy of ADTRAN's U.S. Carrier Networks Equipment Warranty: (877) 457-5007, Document 414.

