


TSU 600/600e

Modular T1/FT1 DSU

Front View



Rear View

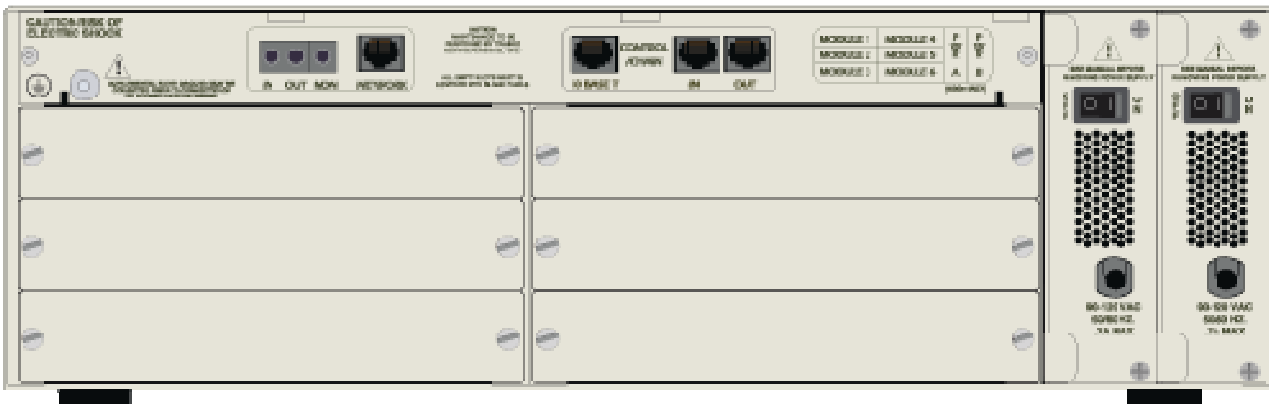

Plug-In with Plug-On Module Installed



Physical Interfaces

- One T1/FT1 Network Interface (Integrated CSU/DSU)
- One 10 Base T Ethernet Interface (TSU 600e)
- Bantam Test Jacks
- Chain In/Out Ports

Physical Specifications

- Chassis: Stand Alone / Rackmount
- Dimensions: 5.5" H, 17.5" W, 12.5" D
- Weight: 13 lbs
- Operating Temperature: 32°F to 122°F (0°C to 45°C)
- Mean Time Between Failure (MTBF)
 - TSU 600 AC: 980,263 Hrs
 - TSU 600e AC: 749,274 Hrs
 - TSU 600 DC: 908,824 Hrs
 - TSU 600e DC: 838,200 Hrs

User Modules

- **DSX-1 Module**
 - Pass Through for T1 RBS/PRI or Data
 - DSX-1 Plug-On only passes RBS when installed on a D&I Plug-In and DS0s are mapped to/from the D&I
 - RBS Can Pass Between the NI and a Plug-In DSX-1
 - Line Length: 0 – 655 ft.
 - Can Only Be Installed in Slot 6
- **Quad FXS Module (Plug In Only)**
 - FXS Distance Limitation: 12k ft.
 - Message Waiting Indication Not Supported
- **Drop and Insert (D&I) Module**
 - Provides a Second T1 Interface
- **Dual FXS Module**
 - FXS Distance Limitation: 12k ft.
 - Supports Message Waiting Indication When Used With Dual FXO
 - Dual FXS Plug-On Must Be Installed On Dual FXS Plug-In
 - FXS Signaling Types
 - Loop Start / Ground Start
 - Tandem (E&M)
 - Dial Pulse Originate (DPO)
 - Private Line Automatic Ringdown (PLAR)
- **Dual FXO Module**
 - FXO Signaling Types
 - Loop Start / Ground Start
 - Dial Pulse Terminate (DPT)
- **Dual E&M/TO Module**
 - Supports E&M Type I, II, III and V
 - 2 or 4 Wire Mode
 - Transmit Only (TO Mode)
- **Dual OCU DP Module**
 - Connects external 56/64k CSU/DSU devices over point to point T1
 - Does not support 56/64k DDS extension/backhaul from PSTN
 - Asynchronous operation only
 - DDS breakout from carrier provided T1
 - Line Length: 18k ft. over 24 AWG Copper
- **Dual DSU III Module**
 - Synchronous Data Rates from 2.4 to 64 kbps
 - Asynchronous Data Rates from 2.4 to 57.6 kbps
 - Provides two EIA-232 or V.35 Interfaces (Adapter Cable Required)

User Modules (Continued)

- **Nx 56/64 V.35 Module**
 - Female Connector
 - Synchronous Data Rates from 56 kbps to 1.536 Mbps
- **Nx 56/64 530 Module**
 - Female Connector
 - Synchronous Data Rates from 56 kbps to 1.536 Mbps
- **TSU NetVanta Router Module (Plug-In Only)**
 - Supports all features of the NetVanta 3200 2nd Gen
 - Network T1 must be B8ZS/ESF
 - Single Ethernet Interface

Performance and Design Considerations

- Network Interface
 - Physical Interface: RJ-48c
 - Framing: D4 (SF)/ESF
 - Line Code: AMI/B8ZS
 - T1 Timing: Network, Secondary NI, Internal, or DTE
 - DS0 Assignment: User Selectable
- V.35 DTE Interface
 - Physical Interface: V.35 (Winchester Type 34 Pin)
 - BIT Rate: 56 Kbps to 1.536 Mbps
 - V.35 Cable not included

Performance Monitoring

- Performance Data
 - BPVs/CRCs, ES, SES, UAS, %AS, %EF SEC
 - Alarms and Error Rates
- Reports
 - NI information stored for 24 Hrs in 15 minute intervals
- PRMS
 - ANSI Performance Report
 - Messages (User Selectable)
- SNMP (TSU 600e Only)

Power Specifications

- AC Power: 90-130 VAC, 0.7 A, 40 W, 136 BTU
- DC Power: 21-26 or 40-56 VDC, 3 A, 40 W, 136 BTU

Agency Approvals

- FCC Part 15 Class A, FCC Part 68
- UL 1950, CUL

Warranty

- 5 Year (Repair & Return)
- www.ADTRAN.com/Warranty

Product Includes

- All TSU 600/6000e units ship with the following:
- Modular-to-Female DB-25 Adapter
- User Manual
- 19" Rackmount Brackets

Ordering Information

TSU 600/600e	Part Number
TSU 600 AC	1202076L2
TSU 600 DC	1202076L2#DC
TSU 600eAC	1202076L1
TSU 600e DC	1202076L1#DC

Modules & Accessories	Part Number
DSX-1 Module (Plug-In)	1200055L1#HS
Drop/Insert Module (Plug-In)	1200065L1
Quad FXS Plus Module (Plug-In)	1202300L1
Dual FXS Plus (MW) Module (Plug-In)	1200080L1#HS
Dual FXO Module (Plug-In)	1200103L2
Dual E&M/TO Module (Plug-In)	1200105L3
Dual OCU DP Module (Plug-In)	1200230L1
Dual DSU III Module (Plug-In)	1200127L1#HS
Nx56/64 V.35 Module (Plug-In)	1202054L1
Nx56/64 530 Module (Plug-In)	1200054L2
TSU NetVanta Router Module (Plug-In)	1202350L1
DSX-1 Module (Plug-On)	1200114L1
Dual FXS Plus (MW) Module (Plug-On)	1200082L1#HS
Dual FXO Module (Plug-On)	1200106L3
Dual E&M/TO Module (Plug-On)	1200106L3
Dual OCU DP Module (Plug-On)	1200231L1
Dual DSU III Module (Plug-On)	1200128L1
Nx56/64 V.35 Module (Plug-On)	1202053L1
V.35 Connector Adapter Cable	1200167L1
RS-232 Connector Adapter Cable	1200167L2

DISCLAIMER

ADTRAN provides the foregoing application description solely for the reader's consideration and study, and without any representation or suggestion that the foregoing application is or may be free from claims of third parties for infringement of intellectual property rights, including but not limited to, direct and contributory infringement as well as for active inducement to

infringe. In addition, the reader's attention is drawn to the following disclaimer with regard to the reader's use of the foregoing material in products and/or systems. That is:

ADTRAN SPECIFICALLY DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL ADTRAN BE LIABLE FOR ANY LOSS OR DAMAGE, AND FOR PERSONAL INJURY, INCLUDING BUT NOT LIMITED TO, COMPENSATORY, SPECIAL, INCIDENTAL, CONSEQUENTIAL, OR OTHER DAMAGES