




## ADTRAN ISU 512e and PICTURETEL 4000 Configuration

---

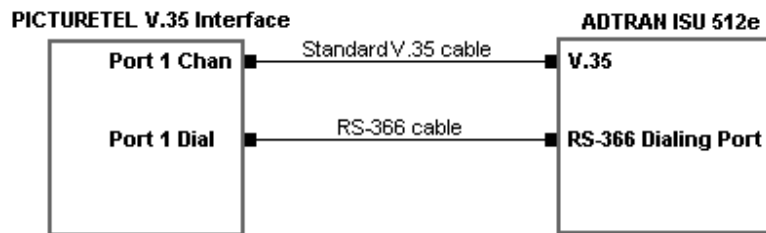

### Picturetel Setting

### ISU 512e Setting

---

Under Network Configuration  
Two Line Dialing Mode: Delayed

1. Program **Switch type** and **Terminal ID** settings per telco
  2. Make sure that 7 digit LDNs are programmed
  3. Quick Setup: **384k BONDING**  
Sets the Following  
**Service type:** ISDN Dial Line  
**Auto Answer:** Enabled  
**Call Type:** 64k  
**Dial Options:** Front Panel  
**Max Bit Rate:** 384k  
**DTR Options:** Ignore  
**Protocol:** BONDING
  4. Set **Dial Option:** EIA366
-