


AP Mounting Kit for NetVanta ActivReach Wall Plate Media Converter

P/N 1702595F21

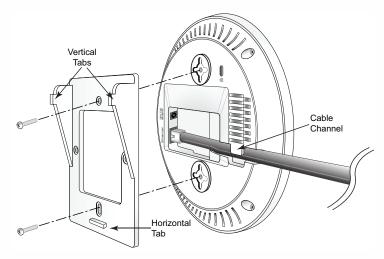

DESCRIPTION

The Access Point (AP) Mounting Kit for NetVanta ActivReach Wall Plate Media Converter was designed to mount a Wi-Fi AP to the NetVanta ActivReach Wall Plate Media Converter (P/N 1702595F17). For instructions on how to mount the Media Converter to a data junction box in a building's existing infrastructure, refer to the NetVanta ActivReach Wall Plate Media Converter Quick Start Guide that shipped with the unit or available online at https://supportforums.adtran.com.

SHIPPING CONTENTS

Shipments of the Access Point Mounting Kit include the following items:

- Mounting bracket
- Two screws
- · Two standoffs
- Two lock washers
- One Cat 5 cable



- The AP mounting bracket for the NetVanta ActivReach Wall Plate Media Converter is intended for use only with the NetVanta ActivReach Wall Plate Media Converter (P/N 1702595G17).
- The AP mounting bracket was designed to mount APs weighing not more than 1 kg (2.2 lbs) and mounted no higher than 1 m (39 in) above the floor.
- For third-party APs, the mounting kit is intended for use only with suitably certified or listed APs.

INSTALLATION INSTRUCTIONS FOR BLUESOCKET APS

- Install the NetVanta ActivReach Wall Plate Media Converter (1702595F17) according to the instructions in the quick start guide that shipped with the unit.
- Insert one end of the supplied CAT 5 cable into the RJ-45 connector on the back of the ADTRAN Bluesocket Access Point (BSAP) routing the cable through the channel (see the illustration to the left).
- Using the screws that shipped with the NetVanta ActivReach Wall Plate Media Converter, mount the bracket to the back of the BSAP.
- Insert the other end of the CAT 5 cable into the RJ-45 connector on the front of the Media Converter (labeled **To Device**) routing the cable through the channel.
- Insert the horizontal tab on the bottom of the bracket into the corresponding slot on the bottom of the Media Converter.
- Holding the bottom of the bracket in place, press the top of the bracket toward the Media Converter until the vertical tabs on each side of the bracket lock into place.

INSTALLATION INSTRUCTIONS FOR THIRD-PARTY APS

- Install the NetVanta ActivReach Wall Plate Media Converter (1702595F17)
 according to the instructions in the quick start guide that shipped with the
 unit up to the point of installing the screws.
- Substituting the standoffs and the two lock washers that shipped with the mounting kit for the mounting screws that shipped with the Media Converter, mount the Media Converter to the junction box.
- Insert one end of the supplied CAT 5 cable into the RJ-45 connector on the front of the Media Converter (labeled **To Device**).
- Following the manufacturer's instructions, mount the third-party AP's bracket to the standoffs in the Media Converter using the screws provided with the mounting kit. Make sure the CAT 5 cable is routed for connection to the AP.
- Insert the other end of the CAT 5 cable into the RJ-45 connector on the AP following the manufacturer's instructions.
- Mount the third-party AP to its bracket following the manufacturer's instructions.